




Natural grass needs oxygen, hence you are required to aerate your pitch. At the same time, you want to have a levelled sports pitch and recover the pitch to excellent conditions. With the Topair you can combine all these operations. The Topair has been developed from the ambition to push towards a sustainable turf care and maintenance market. As a family-owned company we value sustainable entrepreneurship and management. Also, because we want to pass on a sustainable company to the next generation. Therefore, we produce our machines energy neutral, in the most sustainable industrial site of the Netherlands.

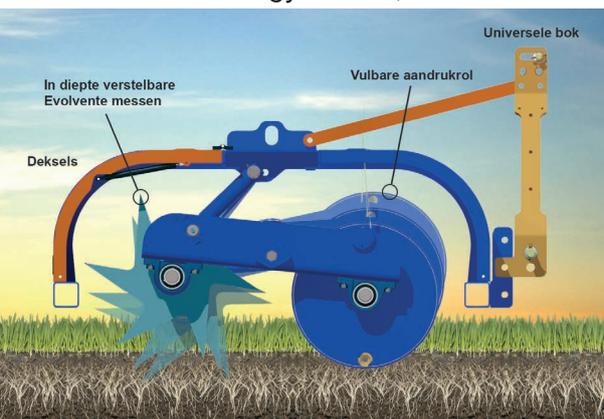

Since you can hydraulically adjust the pressure roller, you can execute both operations separately or you can aerate and level at the same time. The combination of operations contributes to the reduction of the CO2 emissions, and benefit the transition towards chemical free management of your grass.

With the Topair you are in possession of a robust and reliable machine. De Evolvente® blades, that are assembled on the rotor inside, are developed by GKB in a such a way, so that they minimize the prying effect in the upper layer. As a result, the surface layer will stay plain. Furthermore, the specific shape and design of the blades, ensure that there is minimal friction between the blades and the pitch, which will reduce the power usage. The operating speed is thereby around 10 km/h.

THE WORKER IS KING




Topair Specifications:

Type	TA160	TA200	TA240
Working width	160 cm / 63"	200 cm / 79"	240 cm / 94"
Working depth	0 - 16 cm / 0 - 6"	0 - 16 cm / 0 - 6"	0 - 16 cm / 0 - 6"
Dimensions (l x w x h)	155 x 180 x 105 cm / 61 x 71 x 41"	150 x 220 x 100 cm / 59 x 87 x 39"	150 x 260 x 100 cm / 59 x 102 x 39"
Weight (+ water)	550 kg (+ 250 kg) / 1215 lbs (+ 555 lbs)	690 kg (+ 300 kg) / 1525 lbs (+ 665 lbs)	830 kg (+ 400 kg) / 1830 lbs (+ 885 lbs)
Power requirement	> 35 hp	> 45 hp	> 70 hp
Linkage	Standard three-point hitch cat II	Standard three-point hitch cat II	Standard three-point hitch cat II

The following specification is applicable to every Topair model:

Hydraulics	1x double acting hydraulic valve adjustment pressure roller
-------------------	---



THE WORKER IS KING